



Real-Time Motion Control System for Camera Crane Based on PID controller and Inertial Measurement Unit

Hanna Saryboha and Yulia Yamnenko

EasyChair preprints are intended for rapid dissemination of research results and are integrated with the rest of EasyChair.

April 22, 2020

Real-Time Motion Control System for Camera Crane Based on PID controller and Inertial Measurement Unit

H.Saryboha¹ [0000-0003-0805-7899], Y.Yamnenko²[0000-0002-9796-6420]

^{1,2}National Technical University of Ukraine "Igor Sikorsky Kyiv Polytechnic Institute",
Peremohy av., 37, Kyiv, 03056, Ukraine
shteflyuk@ukr.net

Abstract. This paper presents the designing of automatic control system in real-time for vertical and horizontal motion control of camera crane. The traditional camera crane manual control system has some control problems. To meet this, unifying proportional integral derivative (PID) controller with precision Inertial Measurement Unit (IMU) on main board STM32 control were implemented. The mathematical calculations were approved by the results of experimental tests and confirmed by the correct functioning of the processing algorithm and the operation of the system as a whole. Camera crane has 3 axes.

Keywords: Automatic control system, embedded system programming, control laws, PID control, inertial measurement unit, real-time, microcontroller.

1 Introduction

Filmmaking and other applications for action shooting traditionally use the crane, which should move dynamically in inertial coordinates. The crane is used with 3-axis camera putting on it, as shown on Fig.1. The speed range and motion directions of camera crane as usually manually controlled by operator.

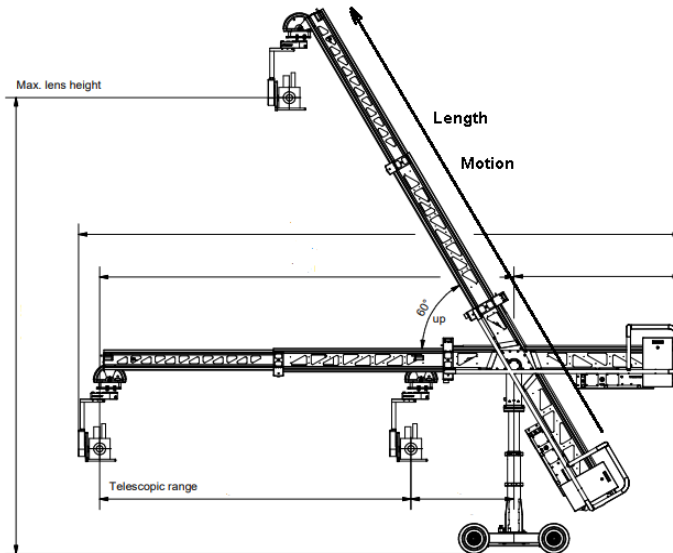


Fig.1. Crane structure and camera crane kinematics

Most of camera crane`s control systems are designed with manual control board, PID controller, rotation mechanism and could operate in manual or semi-automatic operation mode [1]. To control the camera crane operator has to pre-select the speed range on the hand control. In manual mode motion directions are calculated according to the length of the camera crane. It means that operator has to check the present conditions (sensor settings), to compare it with the desired value (processing) and to take appropriate action in order to obtain the desired value (actuator).

This is the simplest way to control camera crane. However, it`s leading to malfunctions in the control system and collisions in communication channel and requires further manual fixing. To avoid these problems and to achieve enough accuracy, reliability and high-speed automatic control systems developed [2-3].

2 Control system

The main task is to design a precision automatic control system and make the possibility to switch on the manual mode. In this case, control system requires a powerful main board, like STM32F4 Discovery, 32-bit ARM Cortex-M core-based microcontroller programmed in C++ Cube IDE [4]. This board controls electronics and mechanics by processing algorithm and visualizes crane camera motion in real time by drawing two moving axes on integrated LCD display.

To control the motion process according to given specifications, connected in a circuit, fed the desired value or conditions and thereby controls the process to maintain the desired values of motion parameters. The advantage of this process is that no human intervention is required. Also, the rate of the process is uniform.

Control system (Fig.2) has two absolute encoders to rotate motors. They have output codes that allows to determine current position, but cannot be transmitted to program code. For this task we used STM32103 board. It has a special interface designed for processing data coming from the encoder. Depending on it, the value of the counting register increases or decreases to determine the side on which the rotation was and indicate the next direction.

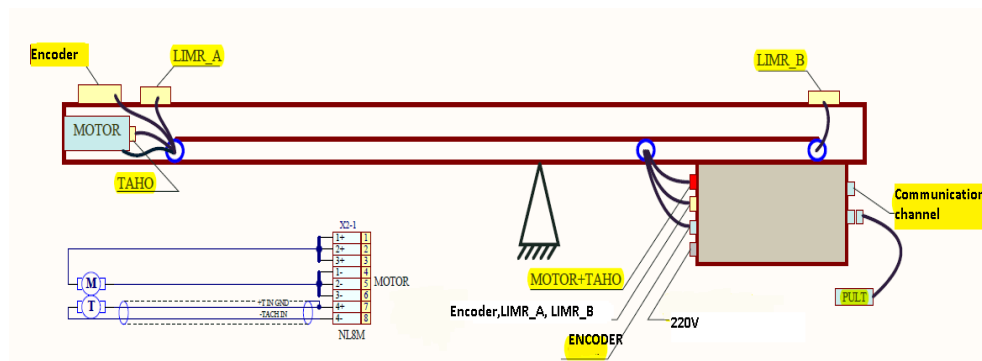


Fig.2. Control system with encoders

Regardless of the control mode, the work begins with a manual control board (pult). In manual control mode it is necessary to track the encoders, because over time there are failures and errors in the rotation system occur. Encoder is the rotation angle sensor for motors to control trolley motion (LIMR_A) and camera crane position (LIMR_B). The quick, sensitive controls avoid distracting start-up rocking motions, which is an advantage that is not to be underestimated as opposed to other drive concepts. To increase the accuracy, the inertial measurement unit (IMU) is integrated to the motion control system.

IMU is a self-contained sensor that measures linear and angular motion usually with a triad of gyroscopes and triad of accelerometers that allows make measurement in 3 axes: pitch, roll, yaw with high precision. An IMU can either be gimbaled or strap down, outputting the integrating quantities of angular velocity and acceleration in the sensor/body frame [5].

Communication channel between all electrical components is organized with commonly used Serial Communication techniques UART. Data frames can have different lengths depending on configuration [6].

In order to switch from manual to automatic mode the operator should start the cran by pushing the button on the pult and the button on STM32F4 Discovery control panel. Data transmitting algorithms consists of following steps:

- Forming data packages and transmission to the communication channel;
- Changing control mode from manual;

- Forming data packages from STM32F4 Discovery with final coordinates and transmission to the communication channel for processing by PID-controller;
- Receiving data packages from STM32F4 Discovery by PID-controller, processing and transmission to the encoder driver;
- Receiving data by encoder driver and start crane boom motion.

The use of microcontroller STM32F4 Discovery as a core of the main control board gives the possibility to control the encoders, increase the accuracy and motion score and transmit signals between functional blocks at the same time (Fig.3).

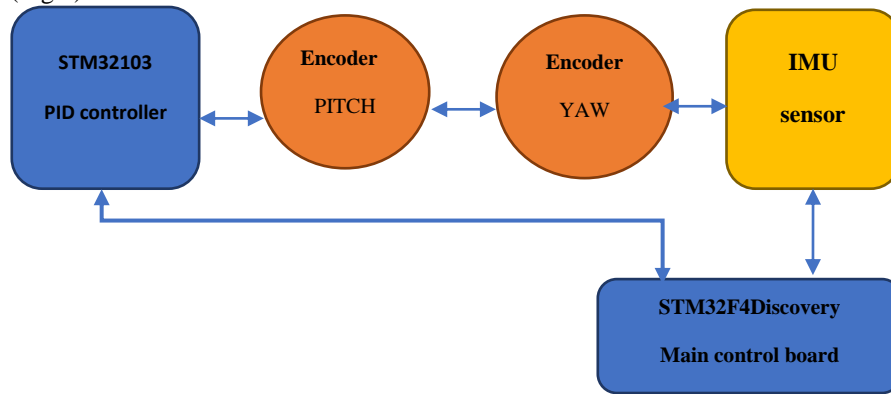


Fig.3. Automatic control system diagram

3 Processing algorithm

Processing algorithm is based on equation of motion and calculates parameters in real time. To obtain equation of motion there is longitudinal form of motion used. It is the movement with zero roll, when the gravity vector and the velocity vector of the crane camera lie in its plane of symmetry as shown on Fig. 4.

The yaw and pitch properties are returned as Euler angles. The values of the pitch and yaw properties are returned in radians.

The camera crane moves along two axes with lifting back and forth. Accordingly, during lifting, the length of the camera crane (l_0 to l), the angles of pitch ($\theta - \theta_0$) and yaw ($\varphi - \varphi_0$) change. To set the right length l_{set} of camera crane equation of motion is used:

$$l_{set} = l_0^2 + l_0^2 \cdot \text{tg}^2\left(\left(\theta - \theta_0\right) \cdot \frac{\pi}{180}\right) + l_0^2 \cdot \text{tg}^2\left(\left(\varphi - \varphi_0\right) \cdot \frac{\pi}{180}\right).$$

An analysis of the compatibility and consistency of manual and automatic control modes designed a block diagram of the algorithm as shown on Fig.6.

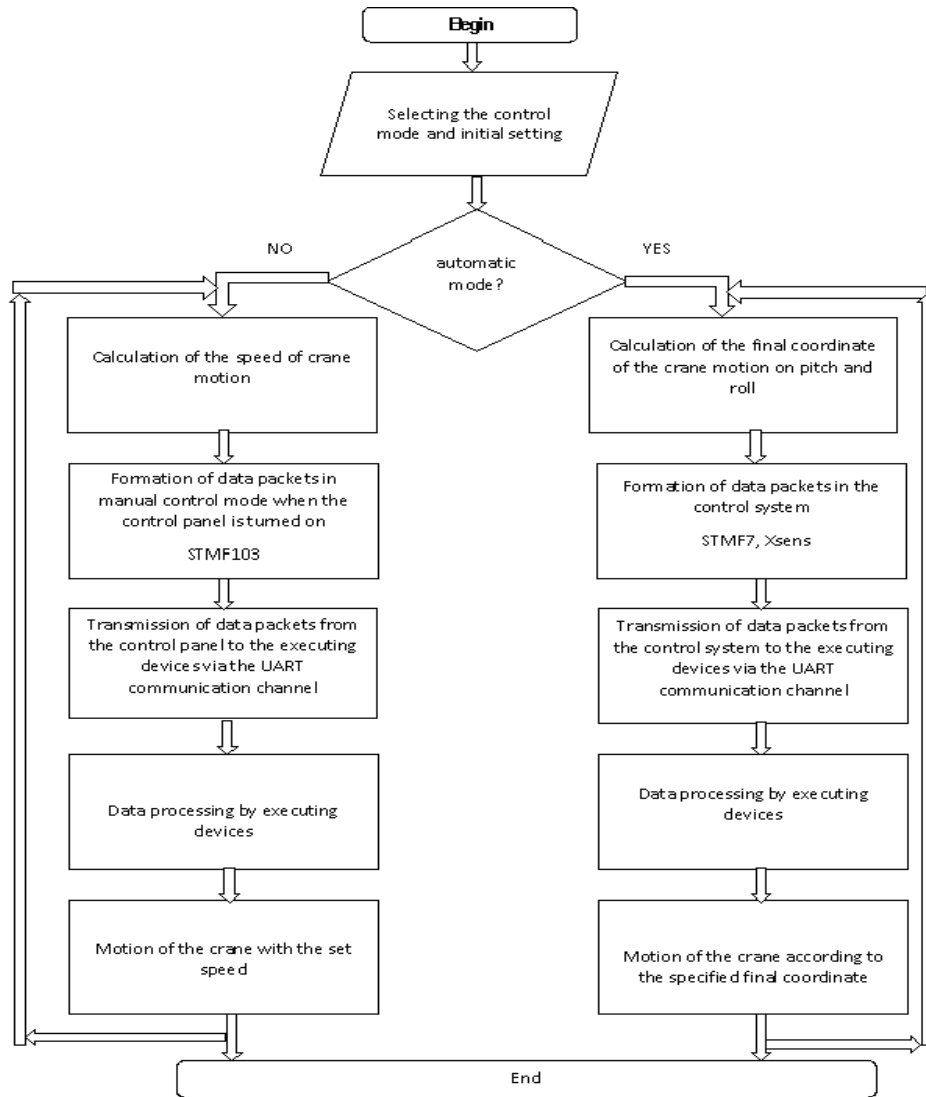


Fig.6. Compatibility and consistency manual and automatic control modes

The results of experimental tests confirmed the correct functioning of the processing algorithm and the operation of the system as a whole, and on their basis we can distinguish the main features of automatic mode:

- tracking precisions – accuracy encoders, IMU and PID controller are tested and function marvellously with tracking UART protocol without cumulative error.
- stable data delivery – designed software superb gear processing and reliable STMicronrollers.
- easy control, compatibility and consistency based on STM electrical crane control system, it works in both manual and automatic modes and can be easily switched.

Conclusions

Developed automatic crane control system has possibility to switch between the manual and automated modes. The system developed provides real-time LCD displaying of crane and camera data content, easy calculation and operation. This automatic control system simplifies the operator work, increases the control score, uses the powerful microprocessors and precision IMU sensor and actuators.

References

1. Thomas Gustafsson Division of Automatic Control Luleå University of Technology Luleå Sweden
2. Frank Owen Control Systems Engineering A Practical Approach P.E. Mechanical Engineering Department California Polytechnic State University San Luis Obispo, California May 2012
3. J. G. Ziegler and N. B. Nichols, "Optimum Settings for Automatic Controllers," Transactions of the ASME, Vol. 64, 1942, pp. 759-768.
4. Jonathan A. Dell Digital Interface Design and Application ISBN: 978-1-118-97432-2 , August 2015, 208 Pages.
5. S. Amsuess, I. Vujaklija, P. Goebel, A. D. Roche, B. Graimann, O. C. Aszmann, and D. Farina, "Context-dependent upper limb prosthesis control for natural and robust use," IEEE Transactions on Neural Systems and Rehabilitation Engineering, vol. 24, no. 7, pp. 744-753, 2015.
6. Osiogun, Ukachi. A presentation on serial communications Seminar Paper on Serial Communication. DOI: 10.13140/RG.2.2.32809.85605 Electronic and Computer Engineering - Nnamdi Azikiwe University, 2015